

PROBE ANODES

Impressed Current Anodes



MATCOR probe anodes are used in cathodic protection systems for water boxes, internal surfaces of pipelines, vessels and other industrial applications.

Contact a MATCOR corrosion expert +1 215 348 2974
www.matcor.com

PROBE ANODES

Impressed Current Anodes



MATCOR probe anodes are used in impressed current cathodic protection systems for water boxes, internal surfaces of pipelines, vessels and other industrial applications.

PRODUCT DETAILS

MATCOR probe anode provides superior performance with the most advanced sealing system available. The MACTCOR probe anode sealing is comprised of machined water stops, O-rings and sealing compounds subject to high pressure sealing during the final phase of assembly. MACTCOR probe anodes are manufactured with a machined stainless steel housing and each probe anode is tested for water sealing and electrical isolation resistance. An optional conduit box is available.

COMPONENTS

- Probe anode segments are available in MMO and platinum/titanium. They are machined with sealing features.
- Probe anode housing is 304/316 stainless steel, schedule 80. Other materials are available.
- An optional conduit box is available
- Internal features include O-rings, sealing compounds and water stops



MATCOR Probe Anode with optional conduit housing.

BENEFITS

Manufactured in the USA at MACTCOR's ISO 9001:2008 facility

100% tested for sealing and electrical resistance integrity


Many standard sizes available

Available in MMO and platinum/titanium



PROBE ANODES

Impressed Current Anodes

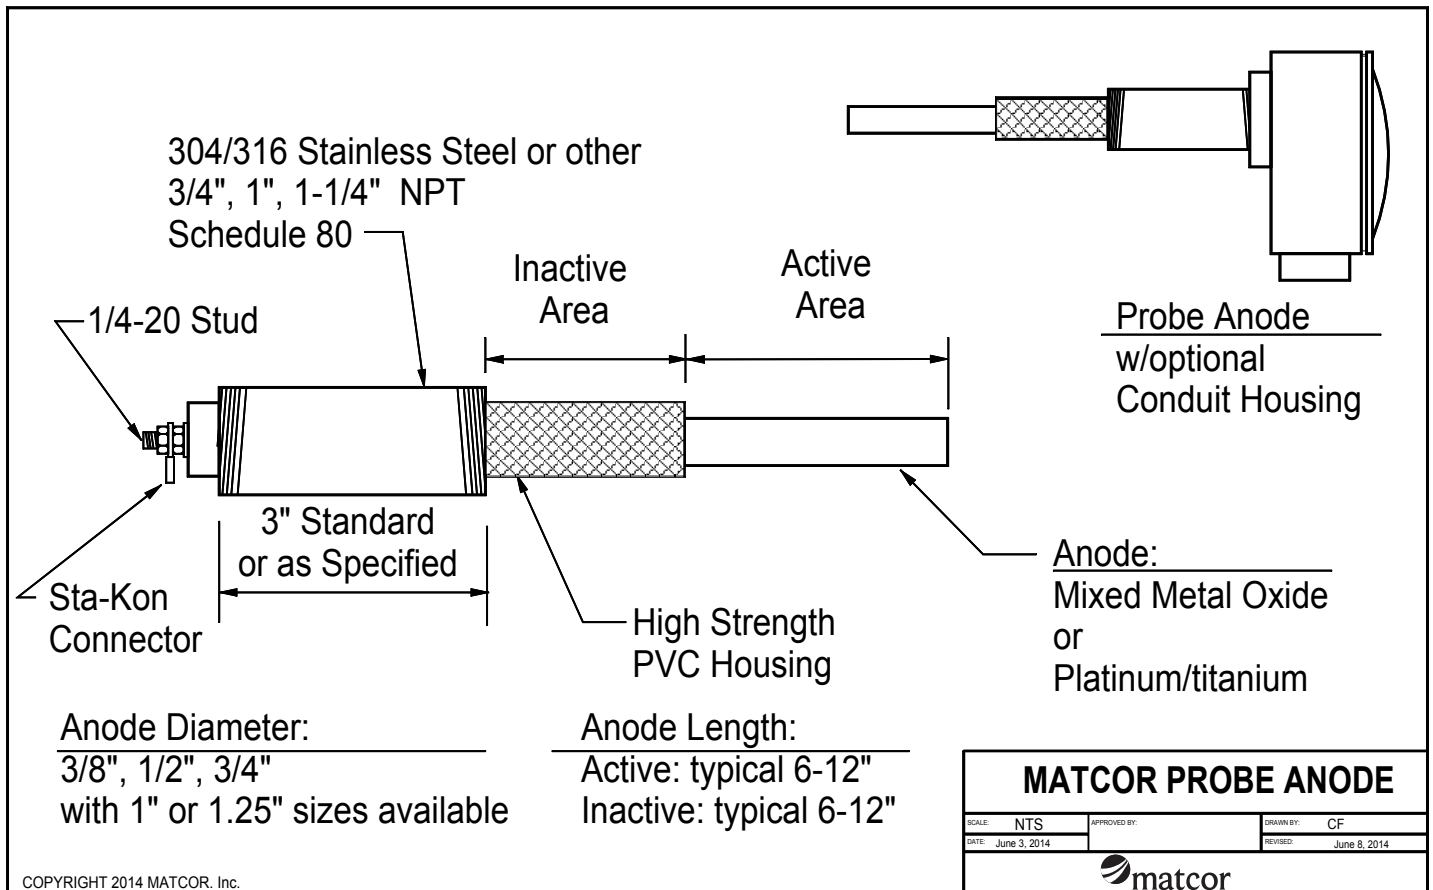

OPTIONS

- Conduit box for anode connections:
specify hub size for conduit connection
- MATCOR probe type reference electrodes
in Ag/Ag/Cl, zinc or other material
- Cathodic protection system design
- Rectifiers and fittings

ORDERING

When ordering the MATCOR probe anode, provide the following:

- Current output
- Life required
- Fresh or sea water
- Nipple material
- Nipple length
- Diameter of anode rod
- Active length
- Inactive length
- MMO or platinum

Contact MATCOR engineering with questions and for assistance with probe anode selection and sizing.

PROBE ANODES

Impressed Current Anodes

STANDARD SIZES AVAILABLE

MATCOR Base Part No.	Anode Diameter Inches (mm)	Active Length Inches (mm)	Platinum Current Output Amps	MMO Current Output Amps	Thread Sizes Available NPT Inches	Resistance Ohms In Seawater 25 Ω-cm
PRN 037506	0.375 (9.5)	6 (152.4)	1.65	3.2	3/4, 1, 1-1/4	2.6
PRN 050006	0.500 (12.7)	6 (152.4)	1.65	4.3	1, 1-1/4	2.4
PRN 075006	0.750 (19.1)	6 (152.4)	1.65	6.4	1, 1-1/4	2.1
PRN 037509	0.375 (9.5)	9 (228.6)	2.5	4.8	3/4, 1, 1-1/4	1.9
PRN 050009	0.500 (12.7)	9 (228.6)	3.3	6.4	1, 1-1/4	1.8
PRN 075009	0.750 (19.1)	9 (228.6)	5.0	9.6	1, 1-1/4	1.6
PRN 037512	0.375 (9.5)	12 (304.8)	3.3	6.4	3/4, 1, 1-1/4	1.5
PRN 050012	0.500 (12.7)	12 (304.8)	3.3	8.5	1, 1-1/4	1.4
PRN 075012	0.750 (19.1)	12 (304.8)	3.3	12.8	1, 1-1/4	1.3
PRN 037518	0.375 (9.5)	18 (457.2)	4.95	9.6	3/4, 1, 1-1/4	1.1
PRN 050018	0.500 (12.7)	18 (457.2)	4.95	12.8	1, 1-1/4	1.0
PRN 075018	0.750 (19.1)	18 (457.2)	4.95	19.2	1, 1-1/4	0.9
PRN 100006	1.0 (25.4)	6 (152.4)	4.4	8.5	1-1/4	1.9
PRN 125006	1.25 (31.8)	6 (152.8)	5.6	10.6	1-1/4	1.8
PRN 100009	1.0 (25.4)	9 (228.6)	6.7	12.8	1-1/4	1.4
PRN 125009	1.25 (31.8)	9 (228.6)	8.3	16.0	1-1/4	1.4
PRN 100012	1.0 (25.4)	12 (304.8)	8.9	17.0	1-1/4	1.2
PRN 125012	1.25 (31.8)	12 (304.8)	11.1	21.3	1-1/4	1.1
PRN 100018	1.0 (25.4)	18 (457.2)	13.3	25.5	1-1/4	0.9
PRN 125018	1.25 (31.8)	18 (457.2)	16.7	31.9	1-1/4	0.8

The inactive area of the probe anode can be provided in varying lengths to accommodate the design and installation. If separation from the structure is not a concern, a minimum inactive length of 3-inches (76.2 mm) is acceptable.



Toll Free (US & Canada) 800 769 5669

Worldwide +1 215 348 2974

matcorsales@matcor.com

www.matcor.com